

Technical Specifications

Thermal Imaging Bullet IP Camera

- 17 μm uncooled VOx microbolometer
- 320x240 / 640x480 Resolutions
- 30 fps or 9fps version for global commercial applications
- Flexible input power options: AC, DC, PoE
- 802.3af (PoE) simplified installation over a single standard cable
- Two-way audio
- Embedded VCA Technology video analytics
- Embedded Storage and Edge Recording
- Image Contrast Enhancement (ICE) features
- IP and analog connectivity
- Indoor/Outdoor (IP66)



CAMERA MODULE (Pixel Array)	
Array Size (Resolution)	ITC6500QD: 320x240 ITC6500VD: 640x480
Detection Type	Uncooled Vanadium Oxide Microbolometer
Sensor Pixel Size	ITC6500QD / ITC6500VD: 17 μm
Spectral Response	8-14 μm
Sensitivity (NETD)	< 50 mK at f/1.0
Lens (FOV)	ITC6500QD: 6°, 9°, 16°, 24°, 42°, 60° ITC6500VD: 12°, 18°, 25°, 37°, 50°
Scanning System	Progressive Scan

VIDEO	
Video Compression	H.264 Baseline, Main, High profile(MPEG-4 Part 10/ AVC), MJPEG(Motion JPEG)
Video Streaming	Dual Stream, Configurable streams in H.264, MJPEG H.264: Controllable frame rate, bandwidth(VBR/CBR) MJPEG: Controllable frame rate, JPEG quality
Resolutions	ITC6500QD: 640x480 (VGA, Scaled-up), 320x240 (QVGA), 160x120 (QQVGA) ITC6500VD: 640x480 (VGA), 320x240 (QVGA), 160x120 (QQVGA)
Frame Rate	Configurable up to 30 FPS or 9 FPS*
Image Settings	Configurable brightness, contrast, and sharpness
Image Orientation	Flip / Mirror / Corridor Mode(-90°, +90°)
Motion Detection	Supported
Video Stabilization	Supported
Burnt-in Text	Supported
Privacy Mask	4 configurable regions
Image Process	Image Contrast Enhancement (ICE™)
Gain / Level Control	Automatic
Smart Bitrate Control	Supported
Analog Output	NTSC / PAL

AUDIO	
Audio Streaming	Two-way
Audio Compression	G.711-uLaw
Audio Input / Output	Supported

NETWORK	
Ethernet Standard	10 / 100 Base-T
IP	IPv4, IPv6
Protocol	QoS Layer 3 DiffServ, TCP/IP, UDP/IP, HTTP, HTTPS, FTP, RTSP, RTCP, RTP/UDP, RTP/TCP, mDNS, UPnP™, SMTP, DHCP, DNS, DynDNS, NTP, SNMP v2c/v3(MIB-II), IGMP, ICMP, SSLv2/v3, TLS, SRTP, RTMP
Security	HTTPS(SSL), SRTP, IP Filtering, Multi-level access with password protection
Users	Live viewing for up to 10 clients

INTEGRATION	
Application Programming Interface	Software Development Kit(SDK) available
ONVIF Compliance	Profile S, Profile G
Event Sources	Sensor(DI); Alarm(DO); Video Motion Detection; Tamper Detection; Video Content Analytics(VCA); Network Loss/Detect; Network Setting Change; Time(Recurrence/Schedule); Storage Error
Event Actions	File upload: E-mail, FTP Notification: E-mail, FTP, HTTP, TCP(push, multicast, TCP event server) Active alarm(DO) Recording Event Log Saving
Event Metadata Streaming (RTSP/RTP)	Video Motion Detection(MD); Video Content Analytics(VCA)

GENERAL	
Material	Poly-carbonate, Aluminum
External I/O Terminals	1x Alarm In, 2x Alarm Out, RS-485
Language on Webpage	Korean, English, Chinese
Power Source / Consumption	DC 12V, AC 24V, PoE / TBD
Operating Conditions	Humidity up to 85% RH (non-condensing) -40°C ~ 60°C (-40°F ~ 140°F)
Weight	TBD
Approvals	TBD
Dimensions (H x V x D)	3.7" x 3.9" x 11.5" (95 x 98 x 293 mm)

Technical Specifications

EDGE STORAGE	
Storage	microSDHC memory card embedded (optional)
Recording Types	Continuous Recording or Event Recording
Continuous Recording	Instant recording; Search & Download
Event Recording	Search of Event Logs; Playback; Download
VIDEO ANALYTICS	
High Performance	Advanced tracking algorithm, low false alarm rate
Easy to Use	Intuitive web browser interface
Detection Zones	Multi-segment polygons and lines
On-screen Display	Real-time display of tracking data and events
Tamper Detection	Detect camera tampering
Presence Filter	Detect presence of an object
Detection Behavior	Direction and Dwell filters
3D Behavior	Perspective corrected size, speed filters and calibration

VIDEO ANALYTICS (OPTIONAL FEATURES)	
Detection Behavior	Enter, Exit, Appear, Disappear, Stop, Tailgating filters
Logical Rules	Extends standard rules to allow various combinations of the inputs
Counting Line	High accuracy people and vehicle counting
Counter	20 counters in total
Counting Report	Generates counter reports based on the counter database
Meta Data	Plain XML Format

Models by Resolution

320x240 Resolution				640x480 Resolution			
Model	FPS	FOV	Standard	Model	FPS	FOV	Standard
ITC6500QD-30A06	30	6.2 x 4.6	QVGA	ITC6500VD-30A12	30	12.4 X 9.3	VGA
ITC6500QD-30A09	30	9 X 6.7	QVGA	ITC6500VD-30A18	30	17.6 X 13.2	VGA
ITC6500QD-30A16	30	16 X 12	QVGA	ITC6500VD-30A25	30	24.8 X 18.6	VGA
ITC6500QD-30A24	30	24 X 18	QVGA	ITC6500VD-30A37	30	37.5 X 28	VGA
ITC6500QD-30A42	30	41.8 X 31.4	QVGA	ITC6500VD-30A50	30	49.8 X 37	VGA
ITC6500QD-30A60	30	60 X 45	QVGA	ITC6500VD-9A12	9	12.4 X 9.3	VGA
ITC6500QD-9A06	9	6.2 x 4.6	QVGA	ITC6500VD-9A18	9	17.6 X 13.2	VGA
ITC6500QD-9A09	9	9 X 6.7	QVGA	ITC6500VD-9A25	9	24.8 X 18.6	VGA
ITC6500QD-9A16	9	16 X 12	QVGA	ITC6500VD-9A37	9	37.5 X 28	VGA
ITC6500QD-9A24	9	24 X 18	QVGA	ITC6500VD-9A50	9	49.8 X 37	VGA
ITC6500QD-9A42	9	41.8 X 31.4	QVGA				
ITC6500QD-9A60	9	60 X 45	QVGA				


*9 Hz models are export controlled by the U.S. Department of Commerce under ECCN 6A993.

30 Hz models are export controlled by the U.S. Department of Commerce under ECCN 6A003b.4.b.

The commodities described herein may require the U.S. Government authorization prior to export or re-export.

Dimensions

(Unit: mm)

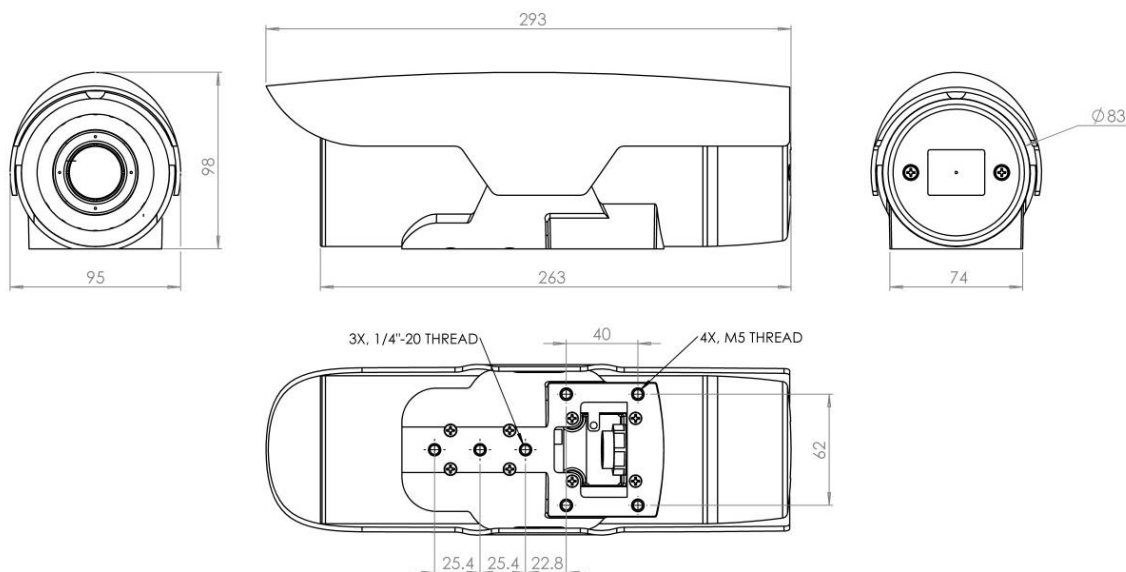

Technical Specifications


Theoretical Distances

(Unit: m)


320 x 240

320 x 240 Resolution					
Lens	Object	Identification	Recognition	Detection	Detection by VCA
6°	Vehicle	830	1,070	4,740	1180
	Person	330	425	2,105	520
9°	Vehicle	560	725	3,390	810
	Person	220	285	1,450	360
16°	Vehicle	320	415	2,055	460
	Person	120	160	845	200
24°	Vehicle	205	265	1,375	300
	Person	75	100	555	131
42°	Vehicle	120	160	840	170
	Person	45	60	330	73
60°	Vehicle	80	115	635	111
	Person	30	45	250	48

Human

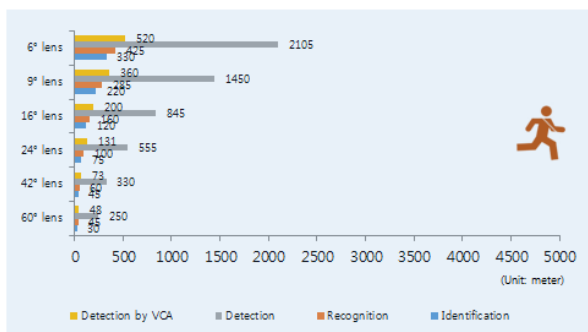


Vehicle

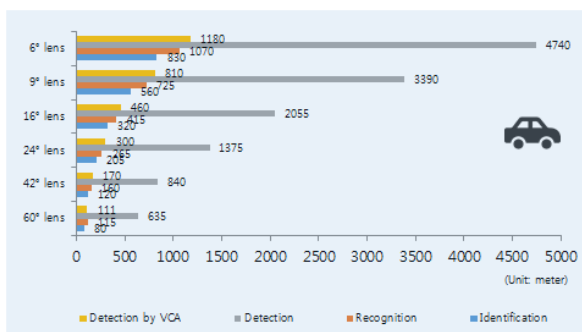


640 x 480

640 x 480 Resolution					
Lens	Object	Identification	Recognition	Detection	Detection by VCA
12°	Vehicle	830	1,079	4,740	1,200
	Person	330	425	2,105	520
18°	Vehicle	560	725	3,390	830
	Person	220	285	1,450	360
25°	Vehicle	395	505	2,475	580
	Person	150	195	1,030	250
37°	Vehicle	280	365	1,825	380
	Person	105	140	745	160
50°	Vehicle	200	260	1,260	270
	Person	60	100	550	110

Human

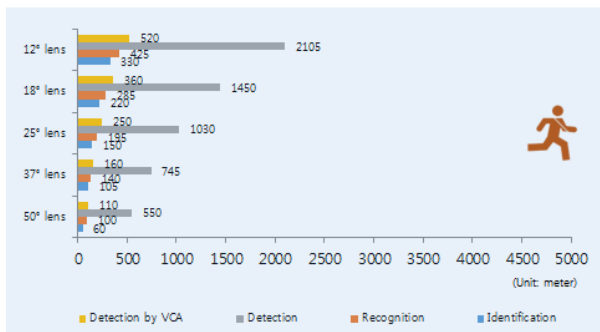

Vehicle

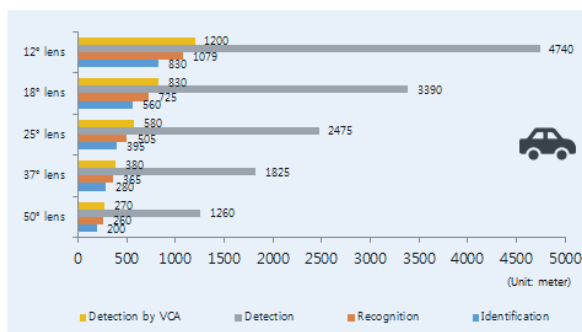

Asia-Pacific:

UDP Technology Ltd.
4F, Woolin Blue 9 Building
240-21, Yeomchang-Dong
Gangseo-Gu, Seoul, 157-861, Korea
Tel: +82-2-2605-1486
Fax: +82-2-2605-1489
Email: sales@udptechnology.com

Europe, Middle East, Africa:

VCA Technology Ltd..
Unit 119, Trident Court
1 Oakcroft Road, Chessington, Surrey
KT9 1BD, UK
Tel: +44-0-20-3044-2884
Fax: +44-0-20-3044-2797
info@vcatechnology.com

Americas:

VCA, Inc.
4700 Innovation Drive
Unit B3, Fort Collins
Colorado 80525, USA
Tel: +1-970-206-0750
sales_usa@udptechnology.com



www.udptechnology.com