


Housing

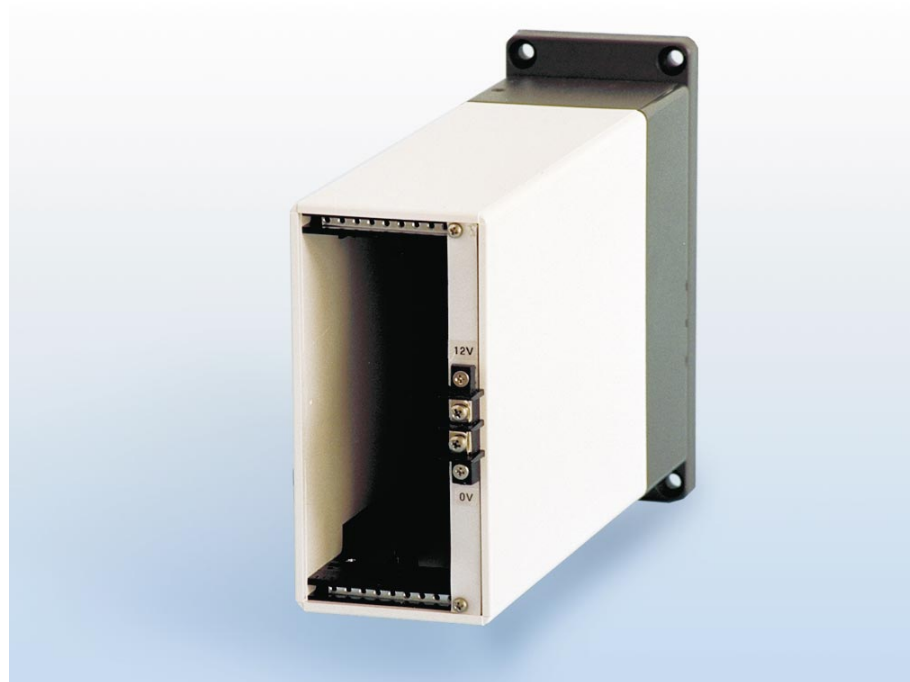

P407 model

ELECTRICAL PARAMETERS	
Input voltage	220 / 110 Vac (factory configurable)
Input voltage tolerance	± 15%
Fuse	0,5 A
Power	15 W
Internal voltage	+5 V (pins 15A, 15B, 16A, 16B) - 5 V (pins 11A, 11B, 12A, 12B) +12 V (pins 23A, 23B, 24A, 24B) - 12 V (pins 3A, 3B, 4A, 4B) GND (pins 1A, 1B, 2A, 2B)
Input connector	Schuko base plug
MECHANICAL PARAMETERS	
Format	Inside plant box of 3U height and 12 TE width
Type of fastening	With screws for wall anchorage Rail anchorage DIN 50022-35 (optional)
External dimensions (see note 1)	68 x 136 x 240 mm
Dimensions of the frame for wall anchorage	68,5 x 164,5 x 11 mm
Number of module guides	2
ENVIRONMENTAL CONDITIONS	
Operating temperature range	-10 °C to +50 °C
Humidity range	0 to 95% without condensation

Note 1.- The dimensions of power cord are not included in the depth dimension

EQUIPOS DE TELECOMUNICACIÓN OPTOELECTRÓNICOS, S.A.

EQUITEL

Polígono de Malpica, calle F Oeste, G. Quejido nave 74

50057 ZARAGOZA (SPAIN)

Tel. +34 976 57 03 53 - Fax. +34 976 57 13 83